

Mini6S+ Standard Package

www.FiberFox.co.kr

Mini 6S+

High-End Core Alignment Splicer



- 1 MINI 6S+ Splicer
- 2 Cleaver Softcase
- 3 MINI 50GB+ Cleaver
- 4 Power Cord
- 5 Data Cable
- 6 AC Adapter
- 7 Car Cigar Cable
- 8 Cooling Tray
- 9 Spare Electrode
- 10 SOC Heater Block
- 11 SOC Holder
- 12 2 Battery Packs
- 13 Shoulder Strap
- 14 User Manual CD
- 15 USB Cable
- 16 Hand Carrying Case

Specifications

Splicing	Method	High-end Core Alignment (AOCAT: Automatic Optical Core Analysis & Tracking System)	
	Loss	SM(0.02dB) / MM(0.01dB) / DS(0.04dB) / NZDS(0.04dB) / G.654 (0.04dB) RL : >>60dB	
	Time	Quick: 4 Sec. / Auto: 9 Sec.	
	Mode	166 modes (Pre-set: 38 / User set-up: 128)	
Applicable Fiber (Cable)	Attenuation	Available range : 0.1 ~ 20dB	
	Fiber Type	SM (ITU-T G.652 & G.657) MM (ITU-T G.651) DS (ITU-T G.653) NZDS (ITU-T G.655) CUT-OFF SHIFTED (ITU-T G.654)	
	Coating Diameter	100-3,000um	
	Cladding Diameter	80-150um	
Heating	Cleaved Length	<250Um Coating : 10-16mm >250Um Coating : 16mm	
	Time	Ave. 10 Sec. (*Micro Sleeve 60mm : 5 Sec)	
	Mode	41 modes (Pre-set: 9 / User set-up: 32)	
Hardware	Applicable Sleeve	20 ~ 60mm	
	Connectivity (link to PC)	USB(5Pin Mini-B)	
	Electrode Life span	>5,500 arcs	
	Data Storage	Splice record : 10,000 / Image : 2,000	
	Fiber detecting	Dual CCD camera with LED emitting system	
	Illumination	LED Spot light	
	Display	Color 4.3" LCD monitor, with Touch Screen (Tempered Glass)	
	Battery		Li-ion 11.1V 5200mAh
			300 cycles (Splicing & Heating) Storage Temperature : -20~40 °C
	Power Supply	AC 100-240V input or DC 12.6V 1.8A	
	Fiber Display (Magnification)		X/Y (Single image): 320x
			X&Y (Dual image): 320x
	Weight	1.5kg (with battery : 1.9kg)	
	Size	124 x 123 x 138mm (L x W x H)	
Reliability	Wind Protection	Wind speed: 15m/s (max)	
	Operating Environment	Altitude: 0-5,000m Temperature: -10~50 °C Humidity: 0-95%RH	
	Storage Condition	Temperature: -20 to 60 °C Humidity: 0-95%RH	
	Pull Test	1.96~2.25N(standard)	



High-End Core Alignment Fusion Splicer

1.5 kg

300 cycles

4 sec

0.02 dB



(Kwang Yi Building) 80, Dongseo-daero 179beon-gil,
Yuseong-gu, Daejeon 34159, Korea
Tel +82-42-716-7221 / Fax +82-42-716-7223 / Email sales@fiberfox.co.kr

www.FiberFox.co.kr



Characteristic

Mini 6S+

1.5kg
(with Battery)

124 x 123 x 138 mm

SOC Compatible

Fast Heating Time
10 sec

LED Injection

Two Batteries are Included
- 300 cycles (splicing & heating) with Two Batteries


Splice Time : 4 sec
Electrode Lifespan : 5,500 arcs

Full Touch Screen
- GUI Interface
- Tempered Glass

01

Technical Detail

AOCAT
Automatic Optical Core Analysis & Tracking

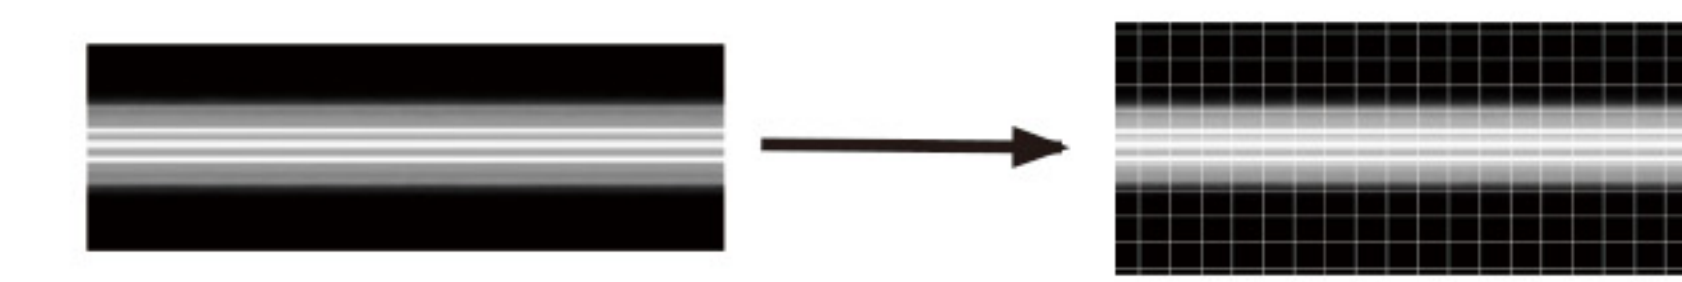

Optical Zoom

Core Analysis

Core coordinate Alignment

02

Durability

1meter

Anti-shock


Dustproof

Waterproof

03

Reliability

Perfect performance
under any environmental conditions

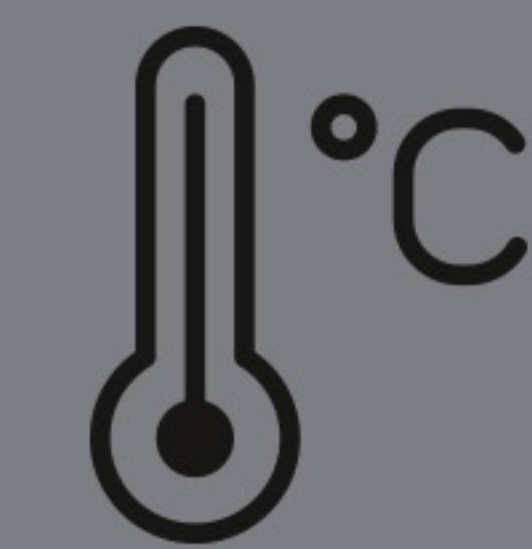

Temperature
-15~60°C



Relative humidity
0~95%



Elevation
0~5000meter



The max wind
speed 15m/s

Compliant with IEC Standard