


Connection components - fiber optic cabling

Patchcord & pigtail terminated with LC APC connectors

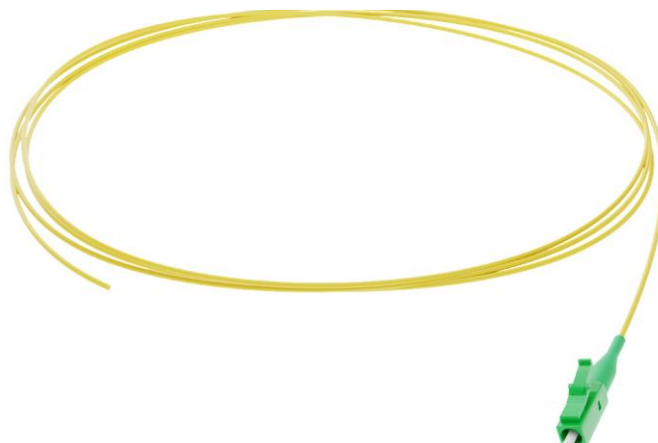

DESCRIPTION:

- pre-connectorized cable with LC APC connectors on both or one side
- available with different type of SM fibers: G652D, G657A1, G657A2, G655
- termination on Ø0.9mm, Ø1.8mm, Ø2.8mm cable
- customized length
- pigtails available in set (6 or 12 pcs) or individually packed

TECHNICAL SPECIFICATION:

Parametr	LC APC
IL_{max} Acc. IEC 61300-3-4	≤ 0.20 dB
IL_{typ} Acc. IEC 61300-3-4	≤ 0.16 dB
RL against MASTER Acc. IEC 61300-3-6	≥ 65 dB

ORDERING INFORMATION:

G-LCA-XX-S-AAA.A-BB-C-DD-Y Syntax order for LCA pigtails
G-LCA-LCA-S-AAA.A-BB-C-DD-Y Syntax order for LCA patchcords

AAA.A – length 1-100m, length tolerance L + 0.1/-0 m
 BB – construction: P9 – BFR 0.9mm, SX – patchcord simplex, DX – patchcord duplex, PS – simplex pigtail (cable Ø1.8mm, Ø2.8mm),
 PD – duplex pigtail (Ø1.8mm)
 C- fiber type; A – G652D, B – G655, D- G657A1, E – G657A2
 DD – cable diameter: 09 -900µm, 18 - 1.8mm, 28 - 2.8mm

Example:

G-LCA-XX-S-002.0-P9-D-09-Y Fibrain pigtail LCA PC SM 09/125 G657A1 yellow 2m length

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.